

## TS82420K - 10W CW, Broadband SP4T GaN RF Switch

### 1.0 Features

- Low insertion loss: 0.2 @ 800MHz
- Low insertion loss: 0.3 @ 2700MHz
- High isolation: 40 @ 800MHz
- High isolation: 25 @ 2700MHz
- P0.1dB: 40dBm CW, 45dBm Peak Power
- No external DC blocking capacitors on RF lines
- Versatile 2.6-5.25V power supply
- Operating frequency: 30 MHz to 5.0 GHz



**Figure 1 Device Image**  
(16 Pin 3×3×0.8mm QFN Package)

### 2.0 Applications

- Private mobile radio handsets
- Public safety handsets
- Cellular infrastructure
- Small cells
- LTE relays and microcells
- Satellite terminals




**RoHS/REACH/Halogen Free Compliance**

### 3.0 Description

The TS82420K is a symmetrical reflective Single Pole Four Throws (SP4T) switch designed for broadband, high power switching applications. Its broadband behavior from 30 MHz to 5.0 GHz frequencies makes the TS82420K an excellent switch for all applications requiring low insertion loss, high isolation, and high linearity within a small package size. This part has the internal charge pump disabled to eliminate the charge pump spurs. A -18V supply is needed on the VCP pin

The TS82420K is packaged into a compact Quad Flat No lead (QFN) 3x3mm 16 leads plastic package.

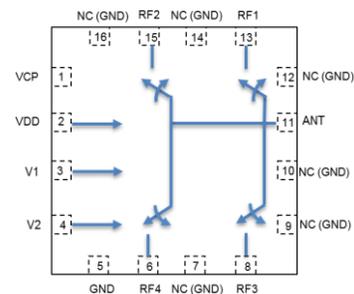

**Figure 2 Function Block Diagram**  
(Top View)

## 4.0 Ordering Information

**Table 1a Ordering Information**

Device Part Number	Package Type	Content
TS82420K	16 Pin 3×3×0.85mm QFN	Core part number
TS82420K-EVB	Evaluation Board	See Figure 3
TS82420KMTRPBF	330mm reel, 3 000 pcs	Ordering code for full reel

**Table 1b Tape and Reel Information**

Form	Quantity	Reel Diameter	Reel Width
Tape and Reel	3,000	13" (330mm)	18mm

## 5.0 Pin Description

**Table 2 Pin Definition**

Pin Number	Pin Name	Description
1	VCP	Negative Voltage Supply, -18V
2	VDD	DC power supply
3	V1	Switch control input 1
4	V2	Switch control input 2
6	RF4	RF port 4
5,7,9,10,12,14,16	NC	No internal connection, can be grounded
8	RF3	RF port 3
11	ANT	Antenna port
13	RF1	RF port 1
15	RF2	RF port 2

**Note:** The backside ground (thermal) pad of the package must be grounded directly to the ground plane of PCB with multiple vias to ensure proper operation and thermal management.

## 6.0 Absolute Maximum Ratings

**Table 3 Absolute Maximum Ratings @T<sub>A</sub>=+25°C Unless Otherwise Specified**

Parameter	Symbol	Value	Unit
<b>Electrical Ratings</b>			
Power Supply Voltage	VDD	5.25	V
Storage Temperature Range	T <sub>st</sub>	-55 to +125	°C
Operating Temperature Range	T <sub>op</sub>	-40 to +85	°C
Maximum Junction Temperature	T <sub>J</sub>	+140	°C
Maximum RF input power	RFx/ANT	41	dBm
<b>Thermal Ratings</b>			
Thermal Resistance (junction-to-case) – Bottom side	R <sub>θJC</sub>	30	°C/W
Thermal Resistance (junction-to-top)	R <sub>θJT</sub>	39	°C/W
Soldering Temperature	T <sub>SOLD</sub>	260	°C
<b>ESD Ratings</b>			
Human Body Model (HBM)	Level 1B	500 to <1000	V
Charged Device Model (CDM)	Level C3	≥1000	V
<b>Moisture Rating</b>			
Moisture Sensitivity Level	MSL	1	-

**Attention:**

Maximum ratings are absolute ratings. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Exceeding one or a combination of the absolute maximum ratings may cause permanent and irreversible damage to the device and/or to surrounding circuit.

## 7.0 Electrical Specifications

**Table 4 Electrical Specifications** @T<sub>A</sub>=+25°C Unless Otherwise Specified; VDD=+3.3V; 50Ω Source/Load.

Parameter	Condition	Minimum	Typical	Maximum	Unit
Operating Frequency		30		5000	MHz
Insertion Loss, RFx	400MHz		0.2		dB
	800MHz		0.2		
	1.95GHz		0.3		
	4.0GHz		0.5		
Isolation ANT-RFx	400MHz		45		
	800MHz		40		
	1.95GHz		30		
	4.0GHz		20		
Return Loss ANT-RFx	400MHz		28		
	800MHz		24		
	1.95GHz		24		
	4.0GHz		18		
<b>Harmonic distortion</b>					
H2	800MHz, CW, Pin=40dBm		86		dBc
H3	800MHz, CW, Pin=40dBm		89		dBc
IIP3	800MHz		74		dBm
CW P0.1dB <sup>[1]</sup>	800MHz	40	43		dBm
Peak P0.1dB <sup>[1]</sup>	800MHz, Duty cycle 1%, Period 1 mS	45	46		dBm
VCP	Iload of 10uA	-19	-18	-17	V
VCP Sourcing Current	Sourcing current of external VCP supply	100			uA
Switching Time	50% ctrl to 10/90% of the RF value is settled. C1=1nF (refer to Figure 3)		0.6		μs
Control Voltage	Power supply VDD	2.6	3.3	5.25	V
	All control pins high, V <sub>ih</sub>	1.0	3.3	5.25	V
	All control pins low, V <sub>il</sub>	-0.3		0.5	V
Control Current	All control pins low, I <sub>il</sub>		0		μA
	All control pins high, I <sub>ih</sub>			7.5	μA
Current Consumption, IDD	Active mode		50	75	μA

**Note:**

[1] P0.1dB is a figure of merit.

[2] No external DC blocking capacitors required on RF pins unless DC voltage is applied on a RF pin.

## 8.0 Switch Truth Table


**Table 5 Switch Truth Table**

V1	V2	Active RF Path
0	0	ANT-RF1
1	0	ANT-RF2
0	1	ANT-RF3
1	1	ANT-RF4


**Attention:**

- [1] VDD should be applied first before VCP. Minimum time between VDD and VCP should be 50usec.
- [2] V1, or V2 can be toggled/switched after VCP has settled.

## 9.0 Evaluation Board (no match)

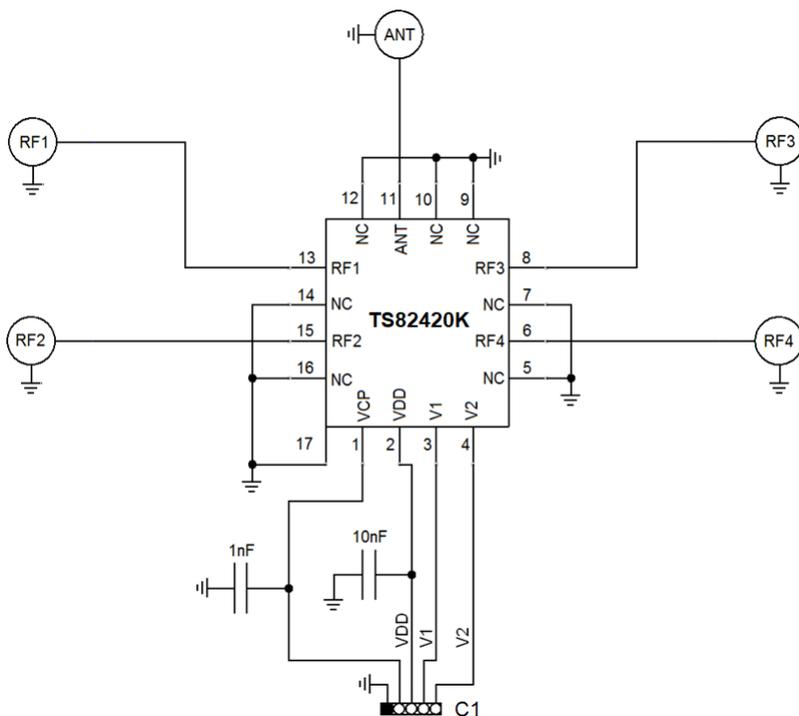

**Figure 3 Evaluation Board Schematic**

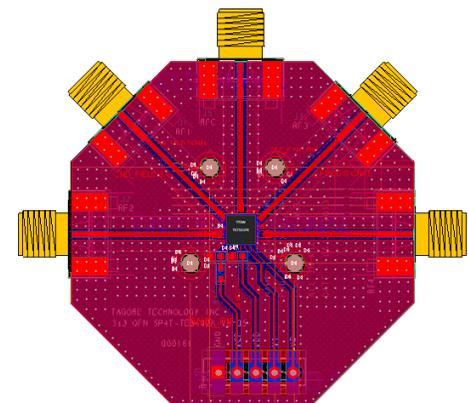


**Figure 4 Evaluation Board Image**

**Attention:**


- [1] 17 refers to the center pad of the device.
- [2] -17V needed on VCP pin
- [3] matched EVB has a series 1nH inductor, and then a shunt 0.3pF capacitor at TS82420K Ant port.

**10.0 Typical Characteristics(matched)**

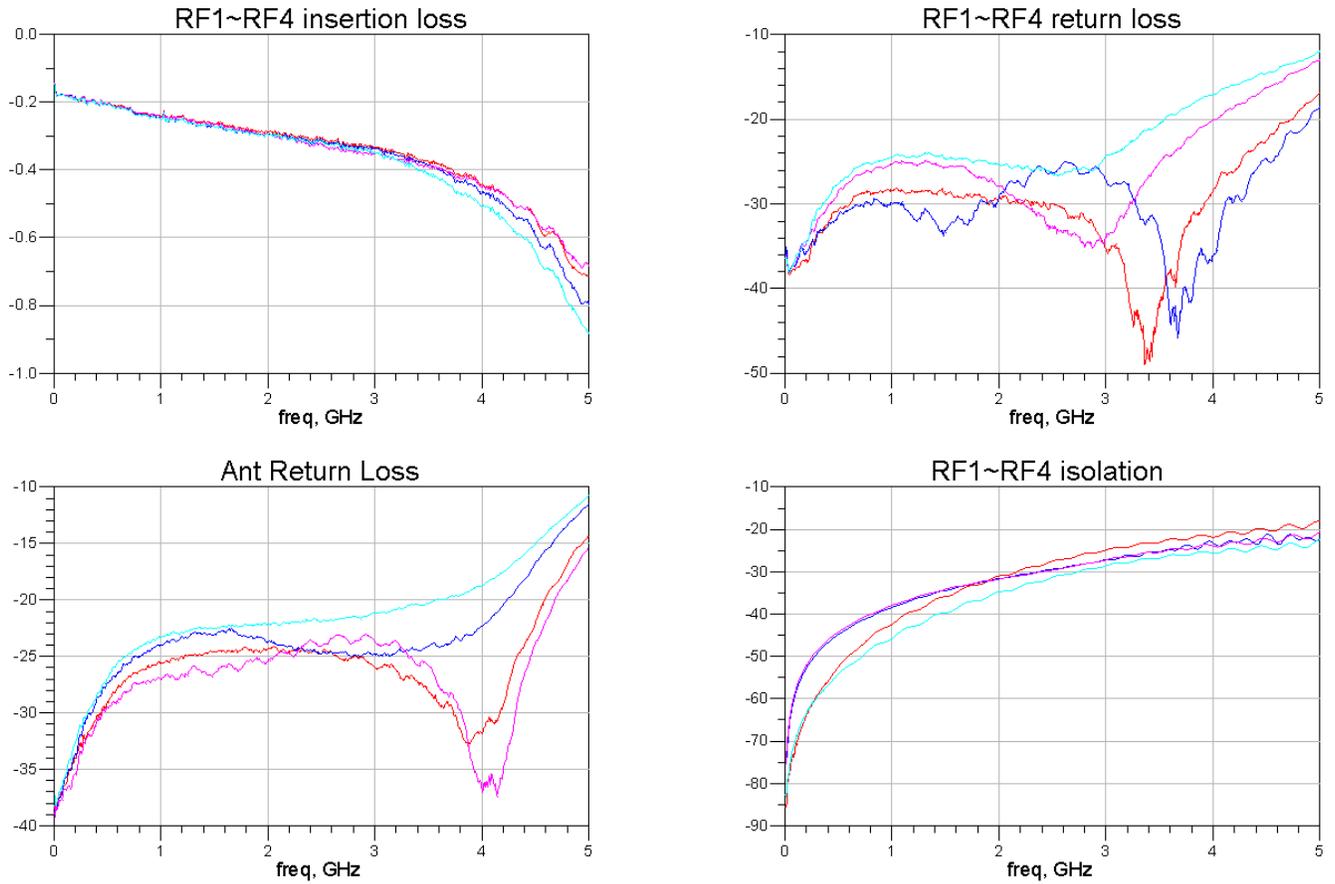

**Figure 5 Typical Characteristics of TS82420K**

**11.0 Device Package Information**

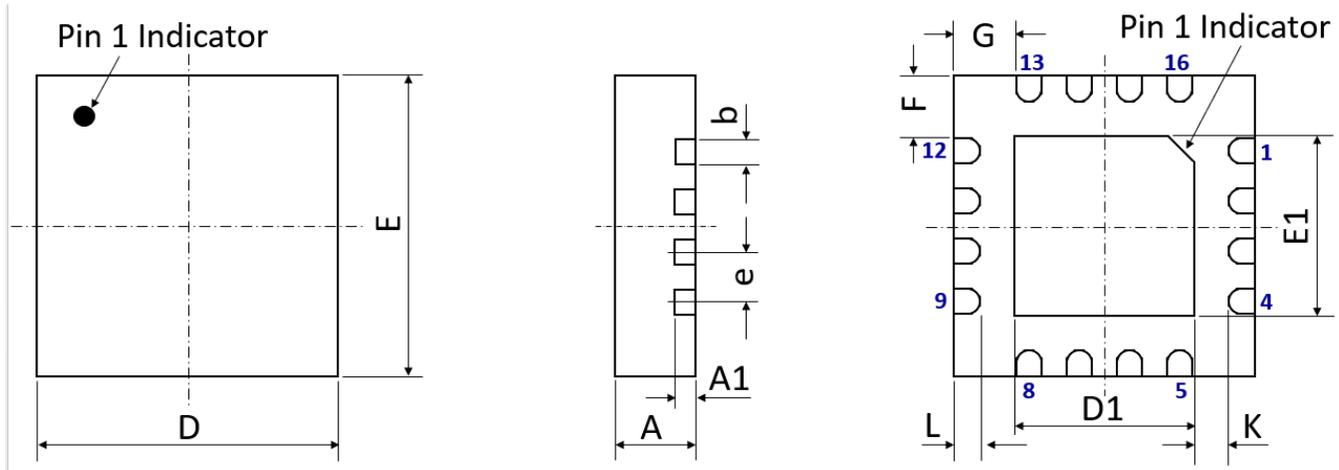

**Figure 9 Device Package Drawing**  
(All dimensions are in mm)

**Table 6 Device Package Dimensions**


Dimension (mm)	Value (mm)	Tolerance (mm)	Dimension (mm)	Value (mm)	Tolerance (mm)
A	0.80	±0.05	E	3.00 BSC	±0.05
A1	0.203	±0.02	E1	1.70	±0.05
b	0.25	±0.05	F	0.625	±0.05
D	3.00 BSC	±0.05	G	0.625	±0.05
D1	1.70	±0.05	L	0.25	±0.05
e	0.50 BSC	±0.05	K	0.40	±0.05

**Note:** Lead finish: Pure Sn without underlayer; Thickness: 7.5µm ~ 20µm (Typical 10µm ~ 12µm)

**Attention:**

Please refer to application notes [TN-001](#) and [TN-002](#) at <http://www.tagoretech.com> for PCB and soldering-related guidelines.

**Top-marking specification:**




- = Pin 1 indicator
- TTSW = Tagore Technology SWitch
- TSXXXXXX = Part number (8 digits max)
- E = A fixed letter before the date code
- YY = Last two digits of assembly year
- WW = Assembly work week


## 12.0 PCB Land Design

### Guidelines:


- [1] 4-layer PCB is recommended.
- [2] Via diameter is recommended to be 0.2mm to prevent solder wicking inside the vias.
- [3] Thermal vias shall only be placed on the center pad.
- [4] The maximum via number for the center pad is  $3(X) \times 3(Y) = 9$ .

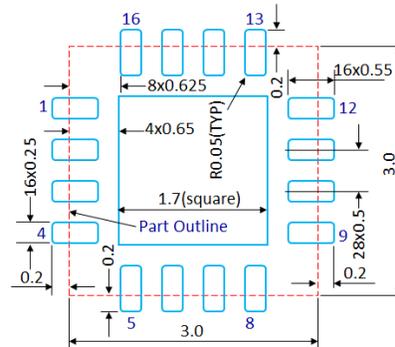

**Figure 10 PCB Land Pattern**  
(Dimensions are in mm)

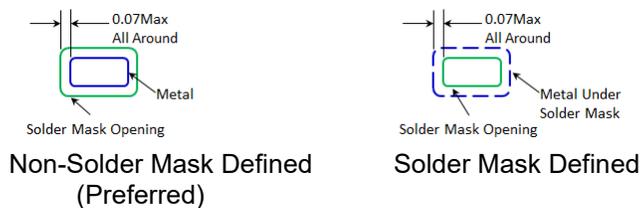

**Figure 11 Solder Mask Pattern**  
(Dimensions are in mm)




**Figure 12 Thermal Via Pattern**  
(Recommended Values:  $S \geq 0.15\text{mm}$ ;  $Y \geq 0.20\text{mm}$ ;  $d = 0.2\text{mm}$ ; Plating Thickness  $t = 25\mu\text{m}$  or  $50\mu\text{m}$ )

### 13.0 PCB Stencil Design


**Guidelines:**

[1] Laser-cut, stainless steel stencil is recommended with electro-polished trapezoidal walls to improve the paste release.

[2] Stencil thickness is recommended to be 125µm.

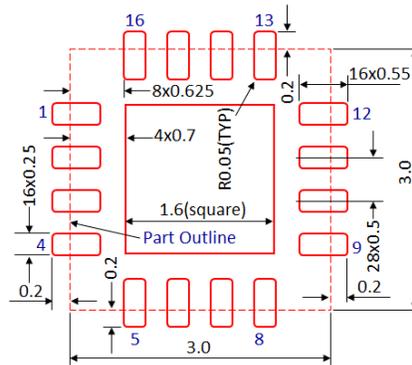


**Figure 13 Stencil Openings**  
(Dimensions are in mm)



**Figure 14 Stencil Openings Shall not Cover Via Areas If Possible**  
(Dimensions are in mm)

**14.0 Tape and Reel Information**

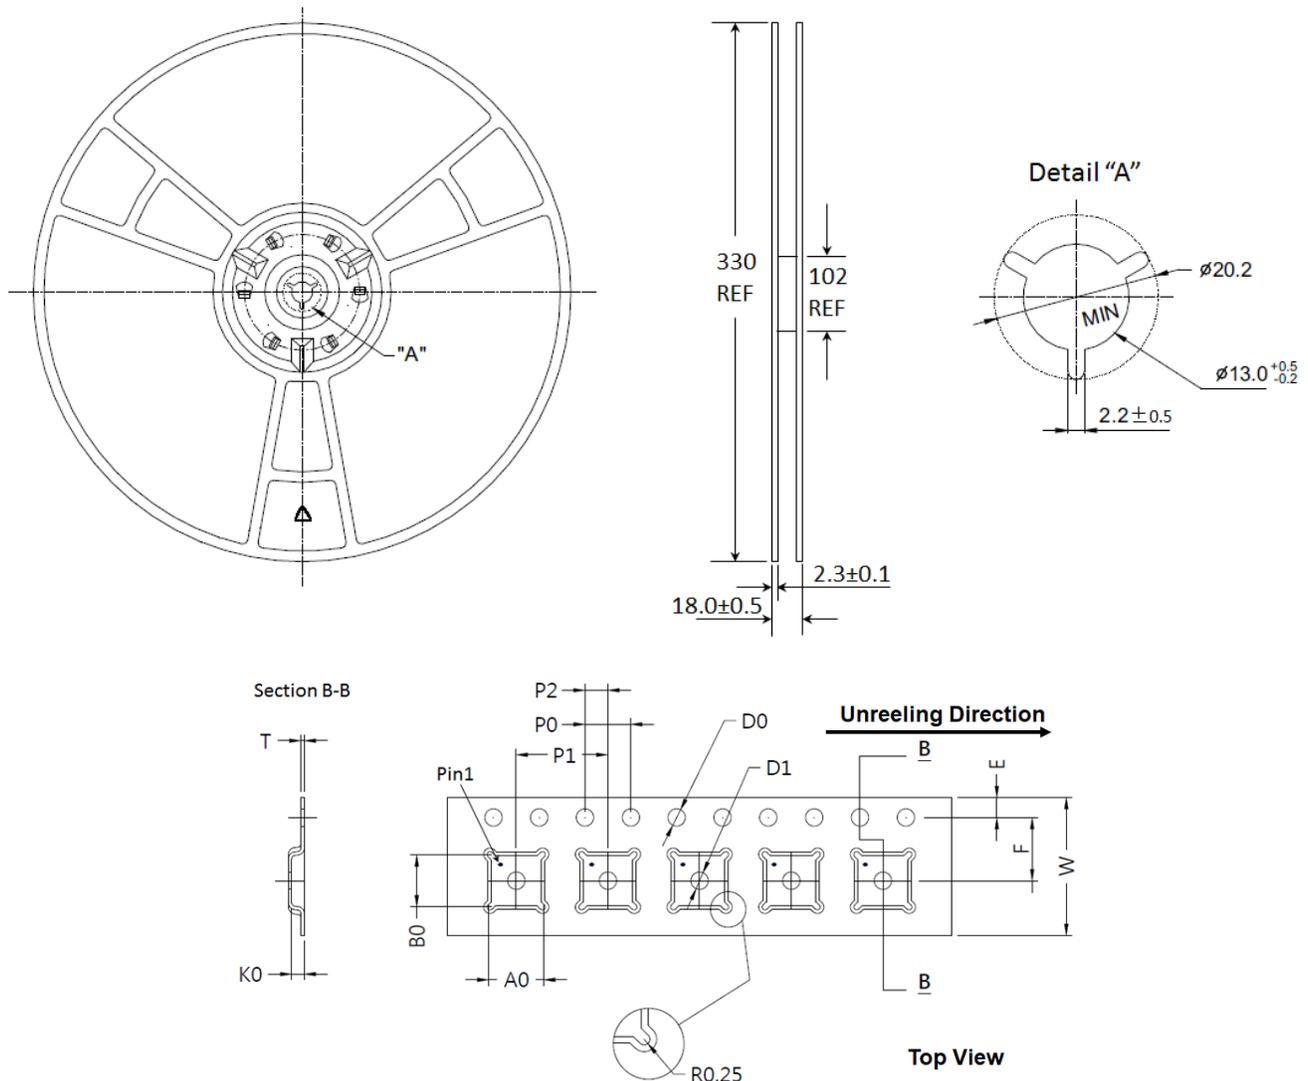

**Figure 15 Tape and Reel Drawing**

**Table 7 Tape and Reel Dimensions**

Dimension (mm)	Value (mm)	Tolerance (mm)	Dimension (mm)	Value (mm)	Tolerance (mm)
A0	3.35	±0.10	K0	1.10	±0.10
B0	3.35	±0.10	P0	4.00	±0.10
D0	1.50	+0.10/-0.00	P1	8.00	±0.10
D1	1.50	+0.10/-0.00	P2	2.00	±0.05
E	1.75	±0.10	T	0.30	±0.05
F	5.50	±0.05	W	12.00	±0.30

**Edition Revision 2.1 - 2025-09-29**

**Published by**

TagoreTech Inc.  
601 Campus Drive, Suite C1  
Arlington Heights, IL 60004, USA

©2024-2025 All Rights Reserved

**Legal Disclaimer**

The information provided in this document shall in no event be regarded as a guarantee of conditions or characteristics. TagoreTech assumes no responsibility for the consequences of the use of this information, nor for any infringement of patents or of other rights of third parties which may result from the use of this information. No license is granted by implication or otherwise under any patent or patent rights of TagoreTech. The specifications mentioned in this document are subject to change without notice.

**Information**

For further information on technology, delivery terms and conditions and prices, please contact TagoreTech: [support@tagoretech.com](mailto:support@tagoretech.com).

**Datasheet**

You can download latest version of datasheet from  
[https://www.tagoretech.com/Product\\_Doc/TS82420K.pdf](https://www.tagoretech.com/Product_Doc/TS82420K.pdf)